



## Technical Details

Barrel length; **12"** / 305 mm, **14"** / 355,6 mm, **18"** / 457 mm

Barrel Twist; **1:7**

Caliber; **5.56** NATO / **223** REM

Overall Length (min/max); 75.6 cm / 84.4 cm

Weight (w/o optics); 2.95 kg / 3.00 kg

Stock type; Adjustable, with **7** positions

Handguard; Free floating KeyMod with  
MIL-STD M1913 Picatinny Accessory Rail

Operation; Gas-operated, rotating bolt (direct impingement)

Forward Assist; **Yes**

Trigger Weight; 1.5 kg – 2.2 kg

Fire Selector; Safe, Semi-Automatic, Full-Automatic

Sling Attachment Points; QD on both sides of the stock

Muzzle Velocity (approx. with M855 ammunition); 910 m/s

Rate of Fire; Approximately 750-850 RPM

Accuracy; sub-MOA @ **100 m** (Chromed barrel), 1.5 MOA @  
**300 m** (Chromed barrel), sub-half MOA @

**100 m** (Extra Durable barrel), 1 MOA @ **300 m** (Extra Durable barrel)

Barrel Life; **15 000** rounds minimum (Chromed barrel)

Parts Life; **12 000** rounds minimum

Other; Stainless steel small parts, improved low mass bolt, long-life springs

Silencer; Optional



SKU No : 2021-512-B-12




SKU No : 2021-512-G-12



SKU No : 2021-512-FDE-12

Barrel Twist;  
**1:7**

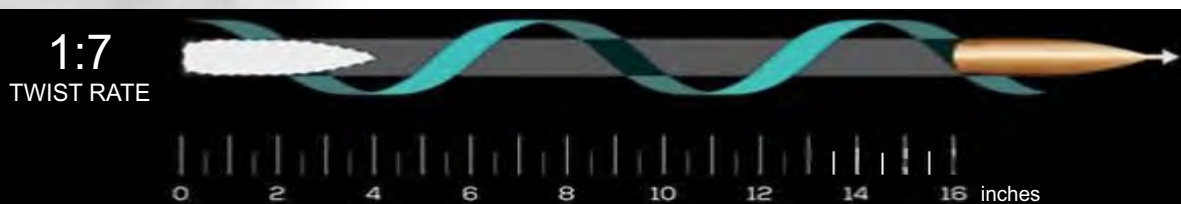

Utas Flash Hider 5.56X45 mm  
(Thread M15X1)



### Technical Details of Silencer

Product Code; UT5S-SLN5S

Caliber; 5.56 x 45 NATO

Overall Length; **139 mm**

Diameter; **53 mm**

Weight; 485 gr. Without flash hider installed

Build Material; Stainless steel baffles and **4140** steel body

Color; Optional

Finish; Cerakote

Flash Hider; Included M15X1

Full-Auto Rated; Full-Auto Rated

Wrench; Included

